



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACR1283L Standalone Contactless Reader

Technical Specifications V1.05





## Table of Contents

1.0.	Introduction .....	3
2.0.	Features .....	4
3.0.	Typical Applications.....	6
4.0.	Technical Specifications.....	7



## 1.0. Introduction



The ACR1283L is a cost-effective and powerful contactless smart card reader designed to operate in standalone mode. Its contactless smart card interface can access major contactless cards following the ISO 14443 standard, which includes the widely used MIFARE® series. It also comes with four built-in SAM slots, making it suitable for a wide range of applications that have multiple card issues or different security requirements. ACR1283L enriches user interaction with its two-line graphic LCD, four LEDs and a buzzer to clearly display application and card operation status, as well as a twelve-key capacitive touch keypad for user input. In addition to its standalone operation, the ACR1283L also supports PC-linked operation for typical contactless PC/SC host applications.

With its high speed 32-bit MCU and strong antenna performance, ACR1283L is ready for highly secure and highly demanding applications where speed and security are of high importance, such as government, time and attendance, payment, and loyalty applications. An all-in-one, cost effective and powerful terminal designed to provide greater flexibility and convenience, ACR1283L is the smart choice for your smart card applications.



## 2.0. Features

- Dual Operation Modes:
  - PC-linked
  - Standalone
- PC-linked Operation:
  - USB 2.0 Full Speed Interface
  - CCID Compliance
  - Supports PC/SC
  - Supports CT-API (through wrapper on top of PC/SC)
- Standalone Operation:
  - Support for third-party application programming
  - Around 400 KB memory space for third-party application
  - Around 500 KB memory space for data storage
  - Supported development platform:
    - IAR Embedded Workbench, Version 5.50 or above
    - CoIDE(GCC), Version 1.3.0 or above
- Smart Card Reader:
  - Contactless Interface Read/Write speed of up to 848 Kbps
  - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
  - Support for ISO 14443 Part 4 Type A and B and MIFARE series
  - Built-in anti-collision feature (only one tag is accessed at any time)
  - Four ISO 7816-compliant SAM slots (MCU Card, T=0 and T=1)
- Built-in Peripherals:
  - Two-line graphic LCD
  - Four user-controllable LEDs
  - User-controllable buzzer
  - Twelve-key capacitive touch keypad
- In-device AES (128 and 256), DES and 3DES encryption
- Supports Android™ 3.1 and above<sup>1</sup>
- USB Firmware Upgradability
- Compliant with the following standards:
  - ISO 14443
  - ISO 7816 (for SAM slot)
  - CE
  - FCC
  - PC/SC

---

<sup>1</sup> Uses an ACS-defined Android Library



- CCID
- RoHS 2
- Microsoft® WHQL




### **3.0. Typical Applications**

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Network Security
- Access Control
- Loyalty Program



## 4.0. Technical Specifications

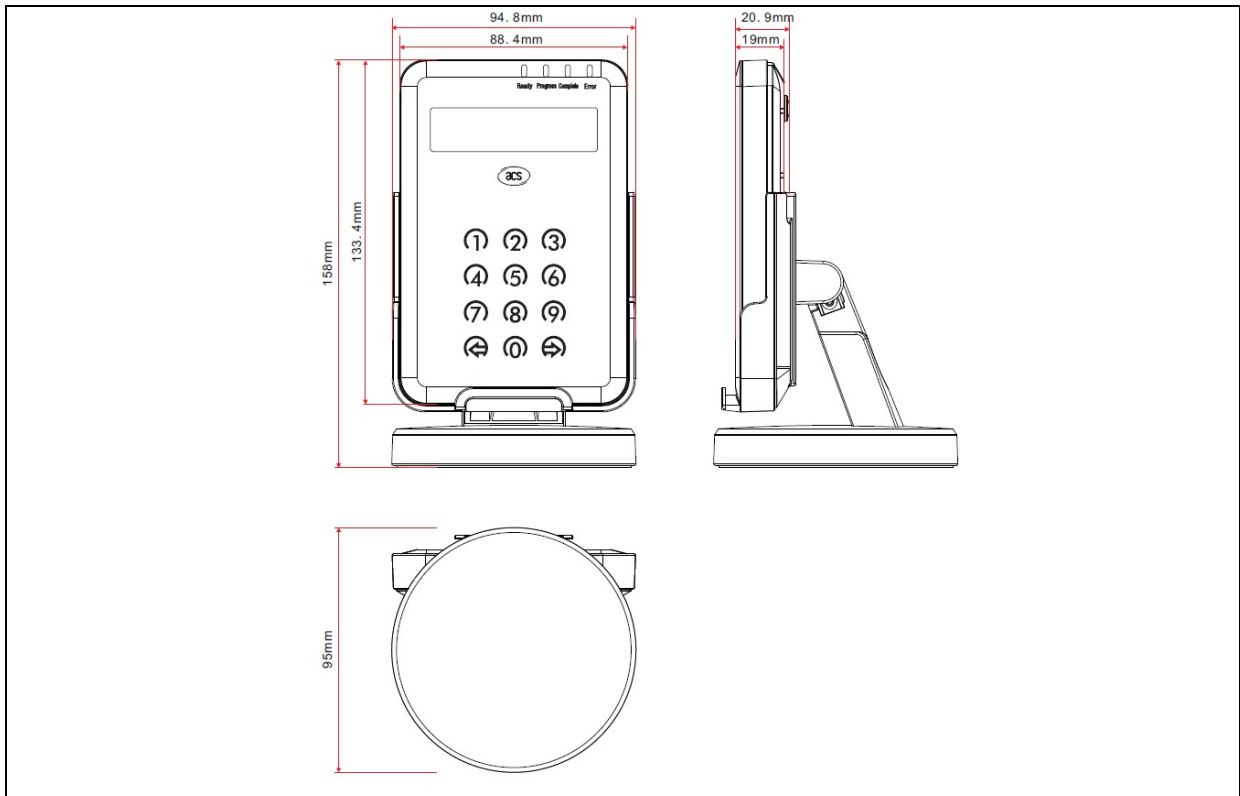

### Physical Characteristics

Dimensions .....	Main Body: 133.4 mm (L) × 88.4 mm (W) × 20.9 mm (H); With Stand: 158.0 mm (L) × 95.0 mm (W) × 95.0 mm (H)
Weight.....	Main Body: 185 g With Stand: 420 g
Color .....	Black

### Device and User-programmable Memory

Third Party Applications .....	400 KB
Data Storage.....	512 KB

### USB Host Interface

Protocol.....	USB CCID
Type .....	Four Lines: +5V, GND, D+ and D-
Connector Type.....	Standard Type A
Power Source.....	From USB port
Speed.....	USB Full Speed (12 Mbps)
Supply Voltage.....	5 V
Supply Current .....	Max. 500 mA
Cable Length.....	1.5 m fixed cable

### Contactless Smart Card Interface

Standard .....	ISO 14443 A and B Parts 1-4
Protocol.....	MIFARE Classic Card Protocol, T=CL
Operating Frequency .....	13.56 MHz
Operating Distance .....	Up to 50 mm (depending on tag type)
Smart Card Read/Write Speed.....	106 Kbps, 212 Kbps, 424 Kbps, 848 Kbps
Antenna Size.....	65 mm × 60 mm

### SAM Card Interface

Number of Slots .....	4 Standard SIM-sized
Standard .....	ISO 7816 Class A, B, C (5 V, 3 V, 1.8 V)
Protocol.....	T=0; T=1
Supply Current .....	Max. 50 mA
Smart Card Read/Write Speed.....	9.6 Kbps – 344 Kbps



Card Connector Type..... SAM Slot 0: Contact  
..... SAM Slot 1: Contact  
..... SAM Slot 2: Contact  
..... SAM Slot 3: Contact

**Built-in Peripherals**

LCD..... 128 x 32 pixel graphic LCD with yellow-green backlight  
..... Number of characters: 2 line x 16 characters  
LED..... 4 single-color: Green, Blue, Orange and Red  
Buzzer..... Monotone  
Keypad..... 3 x 4 Keys Capacitive Touchscreen

**Other Features**

Security..... Tamper Switch (Internal anti-intrusion detections and protection)  
Encryption..... In-device AES, DES and 3DES Encryption Algorithm  
Firmware Upgrade..... Supported

**Application Programming Interface**

PC-linked Mode..... PC/SC  
..... CT-API (through wrapper on top of PC/SC)

**Operating Conditions**

Temperature..... 0 °C – 50 °C  
Humidity..... Max. 90% (non-condensing)  
MTBF..... 190,000 hrs

**Certifications/Compliance**

ISO 14443, ISO 7816, USB Full Speed, PC/SC, CCID, CE, FCC, RoHS 2, Microsoft® WHQL

**Device Driver Operating System Support**

Windows® 2000, Windows® XP, Windows® Vista, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012  
Linux®, Mac OS®, Android™



Android is a trademark of Google Inc.  
Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
Mac OS is a trademark of Apple Inc.  
Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.  
MIFARE is a registered trademark of NXP B.V. and is used under license.