



Advanced Card Systems Ltd.
Card & Reader Technologies

ACOS6 (Contact)



Functional Specifications v3.03



Table of Contents

1.0.	Introduction	4
1.1.	History of Modification	4
1.2.	Symbols and Abbreviations	5
2.0.	Technical Specifications	7
2.1.	Electrical	7
2.2.	Environmental	7
2.3.	Communication Protocol	7
2.4.	Memory	7
2.5.	Cryptographic Capabilities	7
2.6.	File Security	7
2.7.	Answer to Reset (ATR)	7
2.8.	Compliance to Standards	8
3.0.	Card Management	9
3.1.	Card Life Cycle States	9
3.1.1.	Pre-Personalization State	9
3.1.2.	Personalization State	9
3.1.3.	User State	9
3.1.4.	Typical Development Steps of Card	9
3.2.	Card Header Block	10
3.3.	Answer To Reset (ATR)	10
3.3.1.	Customizing the ATR	10
4.0.	File System	11
4.1.	Hierarchical File System	11
4.2.	File Header Data Structure	12
4.2.1.	File Descriptor Byte (FDB)	12
4.2.2.	Data Coded Byte (DCB)	12
4.2.3.	File ID	12
4.2.4.	File Size	12
4.2.5.	Short File Identifier (SFI)	12
4.2.6.	Life Cycle Status Integer (LCSI)	12
4.2.7.	Security Attribute Compact Length (SAC Len)	13
4.2.8.	Security Attribute Expanded Length (SAE Len)	13
4.2.9.	DF Name Length/First Cyclic Record	13
4.2.10.	Parent Address	13
4.2.11.	Checksum	13
4.2.12.	Security Attribute Compact (SAC)	13
4.2.13.	Security Attribute Expanded (SAE)	13
4.2.14.	SE File ID (for DF only)	13
4.2.15.	FCI File ID (for DF only)	13
4.2.16.	DF Name (for DF only)	13
4.3.	Internal Security Files	14
4.4.	Purse File	14
5.0.	Security Features	15
5.1.	File Security Attributes	15
5.1.1.	Compact (SAC)	15
5.1.2.	Expanded (SAE)	15
5.2.	Security Environment	15
5.3.	Mutual Authentication	15
5.4.	Short Key External Authentication	15
5.5.	Secure Messaging for Authenticity (SM-MAC)	15
5.6.	Secure Messaging for Confidentiality (SM-ENC)	16
5.7.	Interaction between Security Conditions and Internal Security EFs	16



- 5.8. Encrypted Code Operations 16
 - 5.8.1. Submit Encrypted Code 16
 - 5.8.2. Change Encrypted Code..... 16
- 5.9. Key Injection 16
- 5.10. Anti-tearing..... 16
- 6.0. Purse Application 17**
 - 6.1. Inquire Account 17
 - 6.2. Debit..... 17
 - 6.3. Credit 17
- 7.0. Life Support Application 18**
- 8.0. Contact Information 19**

List of Figures

- Figure 1** : Card Life Cycle States 9
- Figure 2** : File System Hierarchy 11
- Figure 3** : File Life Cycle Status 12



1.0. Introduction

The purpose of this document is to describe in detail the features and functions of the ACOS6 Multi-Application and Purse Card, a versatile smart card operating system developed by Advanced Card System Ltd.

1.1. History of Modification

Date	Changes
May 2006	ACOS6 revision 1.0
November 2007	ACOS6 revision 3.00 <ul style="list-style-type: none"> • Enhancement added for up to 307.2 kbps communication support • Expanded user storage capacity to 16 Kbyte
November 2008	ACOS6 revision 3.02 <ul style="list-style-type: none"> • Expanded user storage capacity to 32 Kbyte • Added FIPS 140-2 compliant hardware-based RNG • Added short key external authentication • Global level authentication state kept after selecting different DF • ACOS6 Secure Messaging supports SM for Confidentiality (SM-ENC) • Clear card has anti-tearing protection • Card header special function flag to control additional features • Activate/Deactivate command can allows changing the card life cycle states • Remains completely backward compatible to previous ACOS6 versions • Default ATR changed to TA1=95h for increased compatibility
May 2009	ACOS6 revision 3.06 <ul style="list-style-type: none"> • Expanded user storage capacity to 64 Kbyte • Multiple purse file can be used in one DF
October 2009	ACOS6 revision 3.08 <ul style="list-style-type: none"> • SAC support in E-purse for enhanced credit/debit requirement with SM • SAE support for EF
March 2016	ACOS6 revision 3.09 <ul style="list-style-type: none"> • Upgraded to EMTG132 chip from EMTG97

Table 1: History of Modification – ACOS6



1.2. Symbols and Abbreviations

Abbreviation	Description
3DES	Triple DES
AID	Application/Account Identifier
AMB	Access Mode Byte
AMDO	Access Mode Data Object
APDU	Application Protocol Data Unit
ATC	Account Transaction Counter
ATR	Answer to Reset
ATREF	Account Transaction Reference
CLA	Class byte of APDU commands
COMPL	Bit-wise Complement
COS	Card Operating System
DEC(C, K)	Decryption of data C with key K using DES or 3DES
DES	Data Encryption Standard
DF	Dedicated File
ENC(C, K)	Encryption of data P with key K using DES or 3DES
EF	Elementary File
EF1	PIN File
EF2	Key File
FCP	File Control Parameters
FDB	File Descriptor Byte
INS	Instruction byte of APDU commands
IV_Seq	Initialization vector with sequence number used in SM-MAC
LCSI	Life Cycle Status Integer
LSb	Least Significant Bit
LSB	Least Significant Byte
MAC	Message Authentication Code
MF	Master File
MFP	MIFARE® Plus®
MOC	Ministry of Construction – China specifications
MSb	Most Significant Bit
MSB	Most Significant Byte
Nibble	four- bit aggregation; a byte consists of two nibbles
PBOC	People's Bank of China specifications
RFU	Reserved for Future Use
RMAC	Retail MAC
SL0	MIFARE® Plus® Security Level 0



Abbreviation	Description
SL1	MIFARE® Plus® Security Level 1
SL2	MIFARE® Plus® Security Level 2
SL3	MIFARE® Plus® Security Level 3
SAC	Security Attribute – Compact
SAE	Security Attribute – Expanded
SAM	Secure Access Module
SCB	Security Condition Byte
SCDO	Security Condition Data Object
SE	Security Environment
Seq#	Sequence number used in SM-ENC
SFI	Short File Identifier
SM-ENC	Secure Messaging with Encryption
SM-MAC	Secure Messaging with MAC
TLV	Tag-Length-Value
TTREFC	Terminal Transaction Reference for Credit
TTREFD	Terminal Transaction Reference for Debit
UQB	Usage Qualifier Byte
	Concatenation

Table 2: Symbols and Abbreviations



2.0. Technical Specifications

The following are some of the technical properties of the ACOS6 card:

2.1. Electrical

- Operating Voltage: 5 V DC +/-10% (Class A) and 3 V DC +/-10% (Class B)
- Maximum Supply Current: <10 mA
- ESD Protection: ≤ 4 KV

2.2. Environmental

- Operating Temperature: -25 °C to 85 °C
- Storage Temperature: -40 °C to 100 °C

2.3. Communication Protocol

- T=0 with baud up to 223.2 Kbps

2.4. Memory

- Capacity: 64 KB
- EEPROM Endurance: 100,000 erase/write cycles
- Data Retention: 10 years

2.5. Cryptographic Capabilities

- DES, 2K3DES

2.6. File Security

- FIPS 140-2 compliant hardware based RNG
- Mutual authentication with session key generation
- Secure Messaging function for confidential and authenticated data transfers
- Multiple secure e-Purse available for payment applications
- Multi-level secured access hierarchy
- Anti-tearing done on file headers and PIN commands

2.7. Answer to Reset (ATR)

After a hardware reset (e.g. power up), the card transmits an Answer-to-Reset (ATR) in compliance with ISO 7816 part 3, and it follows the same format as that of ACOS2. ACOS6 supports the protocol type T=0 in direct convention. The protocol function is not implemented.

The following is the default ATR. For full descriptions of ATR options see ISO 7816 part 3.

Parameter	ATR	Description
TS	3Bh	Direct Convention.
T0	BEh	TA1, TB1, TD1 follows with 14 historical characters.
TA1	95h	Capable of high-speed communication.
TB1	00h	No programming voltage required.



Parameter	ATR	Description
TD1	00h	No further interface bytes follow.
14 Historical Characters		

Table 3: Default Configuration of the Answer to Reset

The 14 historical characters are composed of the following:

Historical Characters	ATR	Description
T1	41h	Indicates ACOS Card
T2	03h	Major version
T3	00h	Minor version
T4	00h	} Not used. Compatible with ACOS2
T5	00h	
T6	00h	
T7	00h	
T8	00h	
T9	00h	
T10	00h	
T11	00h	
T12	0x	Card Life Cycle State indicator: 02h: Perso (or pre-perso) State 00h: User State
T13	90h	} Not used. Compatible with ACOS2.
T14	00h	

Table 4: Answer to Reset Historical Bytes

Refer to **Section 3.3** for more information.

2.8. Compliance to Standards

- Compliance with ISO 7816 Parts 1, 2, 3, 4

3.0. Card Management

This section outlines the card level features and management functions.

3.1. Card Life Cycle States

ACOS6 has the following card states:

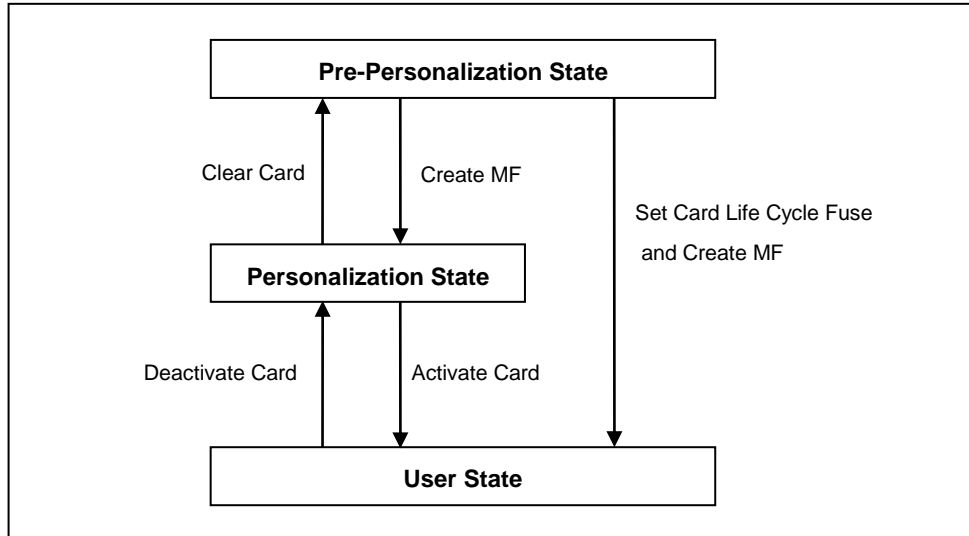


Figure 1: Card Life Cycle States

3.1.1. Pre-Personalization State

This is the initial state of the card. The user is allowed to freely access the card header block (defined in the last section). The card header block can be referenced by its address using the READ BINARY or UPDATE BINARY command.

The User can personalize the Card’s Header Block as he wishes. Card remains in this state as long as: (1) MF is not created; and (2) the *Card Life Cycle Fuse (address EEC7)* of the *Card Header Block* is FFh.

3.1.2. Personalization State

The card goes into this state once the MF is successfully created and *Card Life Cycle Fuse* is not blown (still FFh). User can no longer directly access the card’s memory as in the previous state. User can create and test files created in the card as if in Operational Mode.

User can perform tests under this state and may revert to the Pre-Personalization State by using the CLEAR CARD command.

3.1.3. User State

The card goes into this state once the MF is successfully created and *Card Life Cycle Fuse* is blown. Alternatively, users can use the ACTIVATE CARD command to go from the personalization state to user state.

The card cannot revert back to previous states when *Card Life Cycle Fuse* is set (00h) and bit 5 of Special Function Flags (Deactivate Card Enable Flag) is not set. The CLEAR CARD and DEACTIVATE CARD commands are no longer operational.

3.1.4. Typical Development Steps of Card

1. User personalizes the card’s header block using UPDATE BINARY.



2. User then creates his card file structure, starting with MF. Dedicated Files (DF) and Elementary Files (EF) are created and the card's security design is tested at this state. If design flaws are found, user can always return to state 1 using the CLEAR CARD command.
3. Once the card's file and security design is final and tested, perform CLEAR CARD command and blow the *Card Life Cycle Fuse* using the UPDATE BINARY command (write 00h to address EEC7h).
4. Card goes into Operational Mode, when the MF is created again. User can re-construct the file system under this state. Card can no longer go back to previous states.

User may choose to set the enable DEACTIVATE CARD command in card header block. This allows step 3 and 4 to be replaced by the ACTIVATE CARD command. If the application developer wishes to clear this card, the DEACTIVATE CARD command can be used. To control the access to the DEACTIVATE CARD command, an extended security attribute can be set.

3.2. Card Header Block

The ACOS6 card operating system has 64 KB EEPROM. In its initial state (where no file exists), the user can access the card header block by using read/write binary with the indicated address.

3.3. Answer To Reset (ATR)

After hardware reset (e.g. power up), the card transmits an Answer To Reset (ATR) in compliance with ISO 7816 Part 3, ACOS6 supports the protocol type T=0 in direct convention. The protocol function is not implemented.

For full descriptions of ATR options see ISO 7816 Part 3.

3.3.1. Customizing the ATR

ACOS6's ATR can customize the transmission speed or have specific identification information in the card. The new ATR must be compliant to ISO 7816 Part 3. Otherwise, the card may become unresponsive and non-recoverable at the next power-up or card reset. Therefore, it is only recommended to change T0 (lower nibble), TA1 and historical bytes.

3.3.1.1. Customized ATR for Microsoft Windows Usage

For Windows® 7 and above operating systems: Windows automatically attempts to download the smart card's minidriver whenever a smart card is inserted into the smart card reader. Since ACOS6 is not intended to conform to Windows default usage, such smart card minidriver is not necessary. However, if the ACOS6 is inserted into a Windows system, Windows may search online for the driver and may give a warning that the "device driver was not successfully installed" for the smart card. There are two ways to solve this issue:

1. Disable smart card plug and play and certificate propagation in Windows.
2. Change the ATR so Windows will recognize the ACOS6 smart card to use ACS's Unified Null Driver.

For the first solution, please follow instructions in this Microsoft® support link to disable smart card plug and play. This may have to be done for every computer that will be used in this system. <http://support.microsoft.com/kb/976832>.

For the second solution, ACS has developed a Unified Null driver for ACOS line of smart cards. The Unified Null driver will satisfy the Windows requirement to have a minidriver for the card, hence the warning from Windows every time the card is inserted will now be removed. The Unified Null Driver can be downloaded automatically from Windows Update if Automatic Updates are turned ON. In order for Windows to recognize the ACOS6 smart card to use the Unified Null driver, the ATR must be customized. In the case of ACOS6, the ATR should be:

3B BE XX 00 00 41 43 53 5F 41 43 4F 53 33 5F 4E 44 90 00h.

4.0. File System

This section explores the file system of the ACOS6 smart card.

4.1. Hierarchical File System

The ACOS6 is fully compliant to ISO 7816 Part 4 file system and structure. The file system is very similar to that of the modern computer operating system. The root of the file is the **Master File (MF)**. Each Application or group of data files in the card can be contained in a directory called a **Dedicated File (DF)**. Each DF or MF can store data in **Elementary Files (EF)**.

The ACOS6 allows for an arbitrary depth DF tree structure. That is, the DFs can be nested. Please see the figure below.

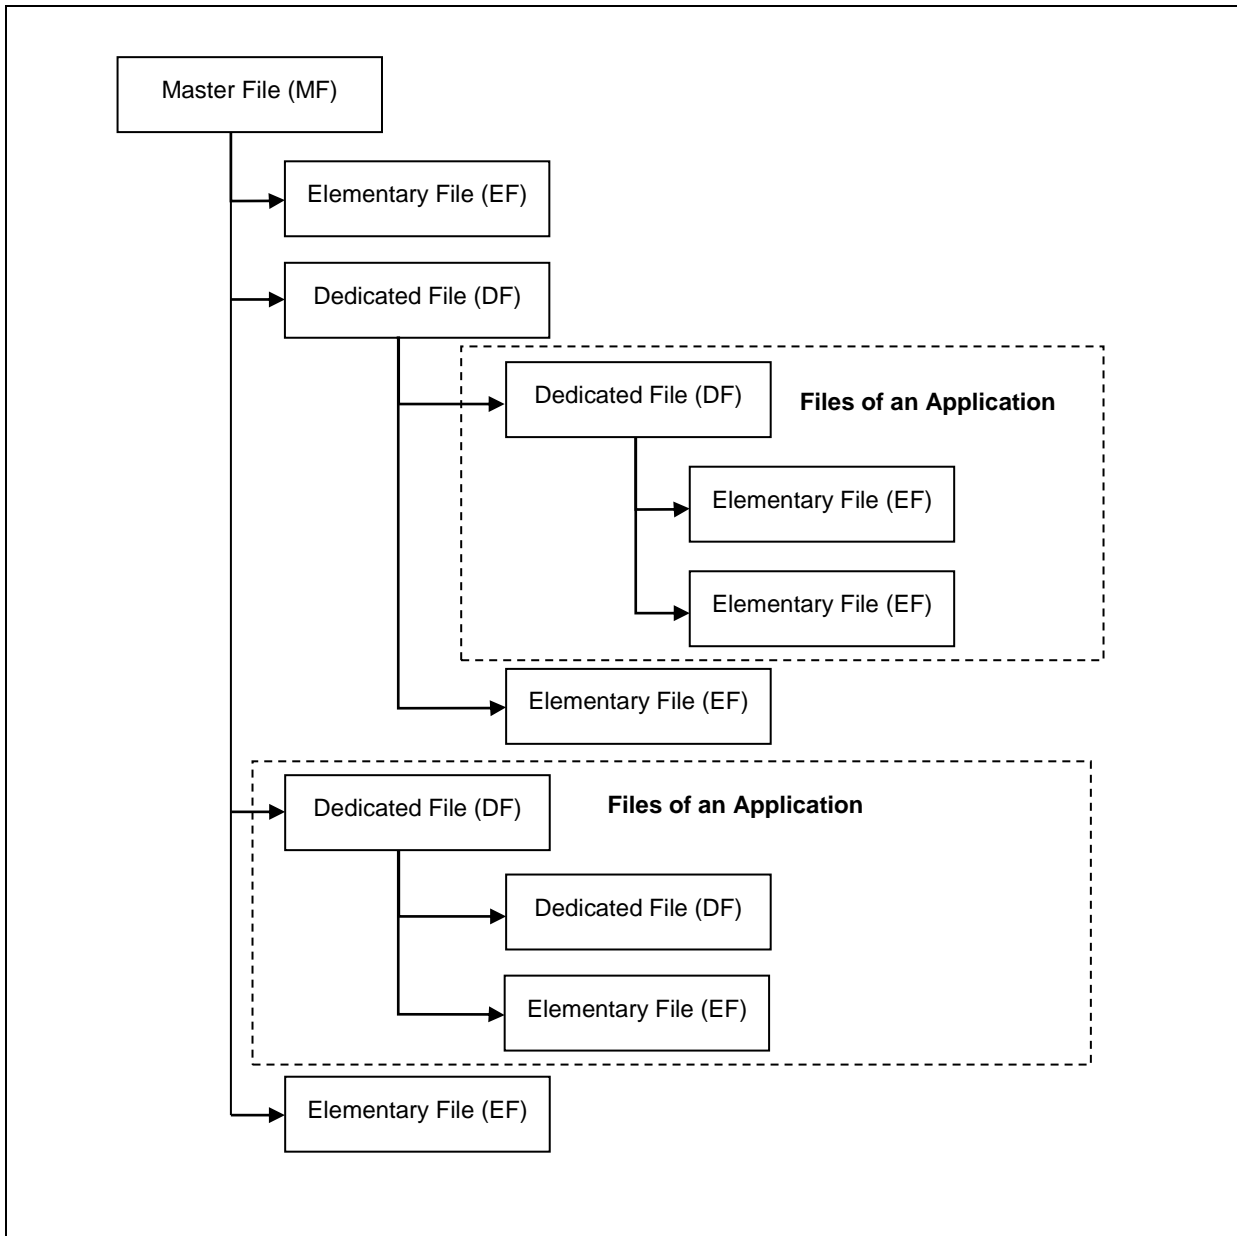


Figure 2: File System Hierarchy

4.2. File Header Data Structure

ACOS6 organizes the user EEPROM area by files. Every file has a File Header, which is a block of data that describes the file's properties. Knowledge of the file header block will help the application developer accurately plan for the usage of the EEPROM space.

4.2.1. File Descriptor Byte (FDB)

This field indicates the file's type. The size of the File Header block varies depending on the file type.

4.2.2. Data Coded Byte (DCB)

The ACOS6 does not use this field. It is part of the header to comply with ISO 7816 Part 4.

4.2.3. File ID

This is a 16-bit field that uniquely identifies a file in the MF or a DF. Each file under a DF (or MF) must be unique.

4.2.4. File Size

This is a 16-bit field that specifies the size of the file. It does not include the size of the file header. For record-based EF's, the first byte indicates the *maximum record length* (MRL), while the second indicates the *number of records* (NOR). For non record-based EF (Transparent EF), the first byte represents the high byte of the file size and the second is the low-order byte. For DF's, this field is not used.

4.2.5. Short File Identifier (SFI)

This is a 5-bit value that represents the file's Short ID. ACOS6 allows file referencing through SFI. The last 5 bits of the File ID does not necessarily have to match this SFI. Two files may have the same SFI under a DF. In such case, ACOS6 will select the one created first.

4.2.6. Life Cycle Status Integer (LCSI)

This byte indicates the life status of the file, as defined in ISO 7816 Part 4.

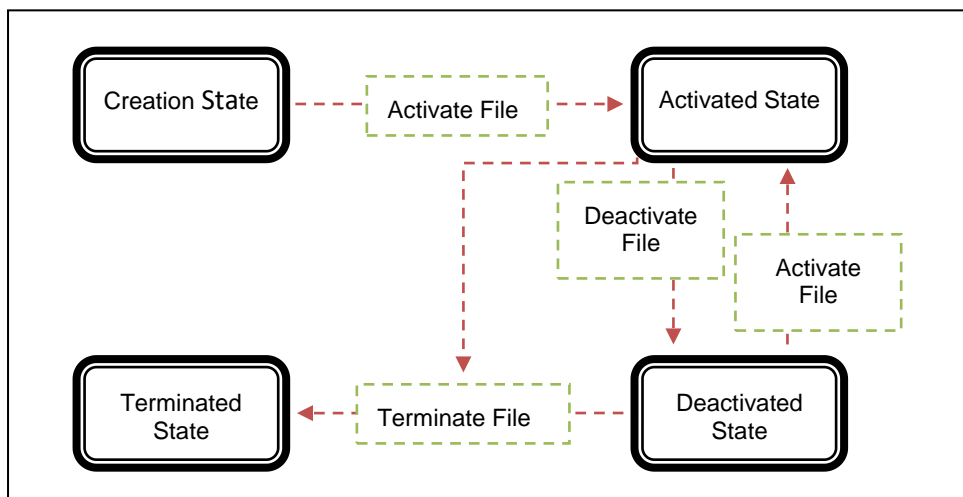


Figure 3: File Life Cycle Status

- In Creation/Initialization states, all commands to the file will be allowed by the COS.
- In Activated state, commands to the file are allowed only if the file's security conditions are met.



- In Deactivated state, most commands to the file are not allowed by the COS.
- In Terminated State, all commands to the file will not be allowed by the COS.

4.2.7. Security Attribute Compact Length (SAC Len)

This byte indicates the length of the SAC structure that is included in the file header below.

4.2.8. Security Attribute Expanded Length (SAE Len)

This byte indicates the length of the SAE structure that is included in the file header below.

4.2.9. DF Name Length/First Cyclic Record

If the file is a DF, this field indicates the length of the DF's Name.

If the file is a Cyclic EF, this field holds the index of the last-altered record.

Otherwise, this field is not used.

4.2.10. Parent Address

Two (2) bytes indicating the physical EEPROM address of the file's parent DF.

4.2.11. Checksum

To maintain data integrity in the file header, a checksum is used by the COS. It is computed by XOR-ing all the preceding bytes in the header. Commands to a file will not be allowed if the file is found to have a wrong checksum.

4.2.12. Security Attribute Compact (SAC)

This is a data structure that represents security conditions for certain file actions. The data is coded in an "AM-SC" template as defined in ISO 7816. The maximum size of this field is 8 bytes. See **Section 5.1.1** for more information.

4.2.13. Security Attribute Expanded (SAE)

This is a data structure that represents security conditions for certain card actions. The data is coded differently from SAC, and is also defined in ISO 7816. The maximum size of this field is 32 bytes. See **Section 5.1.2** for more information.

For DF files, additional fields are included in the file header.

4.2.14. SE File ID (for DF only)

For DF, this field is made up of two (2) bytes containing the File ID of one of its children. That file is known as the Security Environment File, which is processed internally by the COS.

4.2.15. FCI File ID (for DF only)

For DF, this field is made up of two (2) bytes containing the File ID of one of its children. This file is not used in the current version.

4.2.16. DF Name (for DF only)

For DF, this field is the file's Long Name. Files can be selected through its long name - which can be up to 16 bytes.



4.3. Internal Security Files

The behavior of the COS will depend on the contents of the security-related internal files. When internal files are activated, its READ condition should be set to NEVER. Typically, a DF should have: (1) a Key File to hold PIN codes (referred as EF1) for verification, (2) a Key File to hold KEY codes (referred as EF2) for authentication, and (3) an SE file to hold security conditions.

A Key file is an Internal Linear Variable file. It may contain (1) PIN data structure or (2) KEY data structure.

4.4. Purse File

Purse files are Internal Cyclic Files. There can be multiple purse files in a DF. It is compatible with ACOS2 Purse functions. An ACOS6 Purse File always has Record length of 16, and number of records must at least be 3. The first two physical records store information on the purse, while the rest are used to store transactions records (LOG).



5.0. Security Features

This chapter illustrates the access rights and security capabilities of the ACOS6 card along with its environment and usage.

File commands are restricted by the COS depending on the target file's (or current DF's) security Access Conditions. These conditions are based on PINs and KEYS being maintained by the system. Card Commands are allowed if certain PIN's or KEY's are submitted or authenticated.

Global PIN's are PINs that reside in a PIN EF (EF1) directly under the MF. Likewise, local Keys are KEYS that reside in a KEY EF (EF2) under the currently selected DF. There can be a maximum of: 31 Global PINs, 31 Local PINs, 31 Global Keys, and 31 Local Keys at a given time.

5.1. File Security Attributes

Each file (MF, DF, or EF) has a set of security attributes set in its headers. There are two types of security attributes Security Attribute Compact (SAC) and Security Attribute Expanded (SAE).

5.1.1. Compact (SAC)

The SAC is a data structure that resides in each file. It indicates what file actions are allowed on the file, and what conditions need to be satisfied for each action.

The SE record is found in the SE file - whose ID is specified in the current DF's header.

5.1.2. Expanded (SAE)

The SAE is a data structure that resides in each file. It tells the COS whether or not to allow file commands to proceed. SAE is more general compared to SAC. The format of SAE is an access mode data object (AMDO) followed by one or more security condition data objects (SCDO).

5.2. Security Environment

Security conditions are coded in an SE File. Every DF has a designated SE FILE, whose file ID is indicated in the DF's header block. Each SE record has the following format:

<SE ID Template> <SE Authentication Template>

SE ID Template: The SE ID Template is a mandatory data object whose value states the identifier that is referenced by the SC byte of the SAC and SAE.

SE Authentication Template: The Authentication Template (AT) defines the security condition that must be meant for this SE to be satisfied. The security conditions are either PIN or Key authentications.

5.3. Mutual Authentication

Mutual Authentication is a process in which both the card and the card-accepting device verify that the respective entity is genuine. A *Session Key* is the result of a successful execution of mutual authentication. The session key is only valid during a *session*. A session is defined as the time after a successful execution of the mutual authentication procedure and a reset of the card or the execution of another mutual authentication procedure.

5.4. Short Key External Authentication

Short key external authentication uses a card challenge and terminal response method to gain authorization to the card. This allows for shorter external authentication or one-time-password that is more optimal for human input.

5.5. Secure Messaging for Authenticity (SM-MAC)

ACOS6 supports two types of Secure Messaging - *Secure Messaging for Authenticity (SM-MAC)* and *Secure Messaging for Confidentiality (SM-ENC)*. This section discusses SM for Authenticity while



Section 5.6 discusses SM for confidentiality.

SM for Authentication allows data and command that is transferred into the card and vice versa to be authenticated. This ensures that the command is not modified or replayed. Data blocks sent from the sender to the recipient are appended with 4 bytes of MAC. The receiver then verifies the MAC before proceeding with the operation. Before performing SM, both parties must first have a session key by performing mutual authentication in **Section 5.3**.

5.6. Secure Messaging for Confidentiality (SM-ENC)

ACOS6 Version 3.02 and above support ISO secure messaging (SM). Secure messaging ensures data transmitted between the card and terminal/server is secured and not susceptible to eavesdropping, replay attack and unauthorized modifications. The conditions that require secure messaging can be set at the appropriate security conditions byte in **Section 5.1.1**. Almost all of the commands can also use secure messaging initiated by the terminal. The commands that do not accept secure messaging are GET CHALLENGE, MUTUAL AUTHENTICATION and GET RESPONSE.

5.7. Interaction between Security Conditions and Internal Security EFs

This section shows how the DF or working EFs interacts with different internal EFs (SE File, Key File, PIN File) to provide security for the files in question.

5.8. Encrypted Code Operations

Depending on the setting of the PIN records, a code (or a PIN) may be submitted encrypted using the session key generated by mutual authentication.

5.8.1. Submit Encrypted Code

If the setting in the PIN Identifier Byte of the PIN code to be submitted has b6 set, code submission must be encrypted.

5.8.2. Change Encrypted Code

The PIN code can be changed during the activated state of the card.

5.9. Key Injection

Key injection can be used to securely load a key or diversified key from an ACOS6-SAM or terminal into a target ACOS6-SAM or client ACOS6 card. For the purpose of key injection, we shall refer to the ACOS6-SAM with the key to inject the “*source SAM*” and the ACOS6/ACOS6-SAM to receive the key the “*target ACOS6*”.

The target ACOS6 uses the Set Key command and the source SAM will use the Get Key command to perform key injection.

Note: The key injection feature is available for ACOS6-SAM revision 4.02 and ACOS6 revision 3.02 onwards. Please see ACOS6-SAM reference manual for more information.

5.10. Anti-tearing

The ACOS6 uses an anti-tearing mechanism in order to protect card from data corruption due to card tearing (i.e., card suddenly pulled out of reader during data update, or reader suffer mechanical failure during card data update). On card reset, ACOS6 looks at the anti-tearing fields and does the necessary data recovery. In such case, the COS will return the saved data to its original address in the EEPROM.



6.0. Purse Application

ACOS6 contains a secure electronic purse application that can add functionality as a stored value card.

There are four specific commands related to the purse application – INQUIRE ACCOUNT, CREDIT, DEBIT, and GET PURSE TRANSACTION LOG. The following subsections discuss each one in turn.

If the currently selected EF is a Purse EF, the purse command will work on the current Purse File. Otherwise, it will work on the first created Purse EF under the current DF.

6.1. Inquire Account

In the INQUIRE ACCOUNT transaction, the card returns the current balance value together with other relevant account information and a MAC cryptographic checksum on the relevant data. This signature can be regarded as a certificate issued by the card on the current balance and on the immediately preceding transaction. The key to be used in the generation of the MAC cryptographic checksum can be specified.

To prevent a replay attack of the response from a previous INQUIRE ACCOUNT command, the card-accepting device can pass a reference value to the card to be included in the MAC calculation.

6.2. Debit

In a DEBIT transaction, the balance in the account is decremented by a specified amount. The maximum amount that can be debited to the account is the current valance value. Negative balance values are not allowed.

Different security conditions can be specified for the DEBIT transaction to allow for different security requirements.

6.3. Credit

In a CREDIT transaction, the balance in the Account is incremented by a specified amount. The maximum balance MAX BAL – in the first record of the PURSE FILE – allows the new balance to not exceed a specified amount.

The CREDIT transaction should always be carried out under high security processing.



7.0. Life Support Application

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. ACS customers using or selling these products for use in such applications do so on their own risk and agree to fully indemnify ACS for any damages resulting from such improper use or sale.



8.0. Contact Information

For additional information please visit <http://www.acs.com.hk>.

For sales inquiry please send e-mail to info@acs.com.hk.