




**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACM38 Smart Card Reader

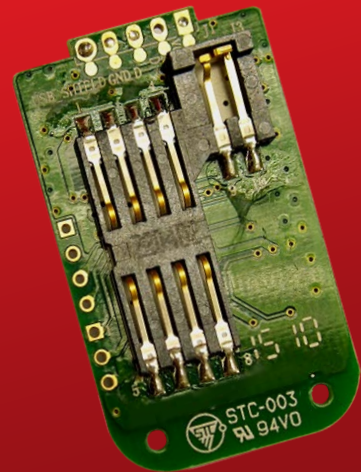

## Technical Specifications



## Table of Contents

<b>1.0.</b>	<b>Introduction .....</b>	<b>3</b>
1.1.	Smart Card Reader.....	3
1.2.	Easy Installation.....	3
<b>2.0.</b>	<b>Features .....</b>	<b>4</b>
<b>3.0.</b>	<b>Supported Card Types .....</b>	<b>5</b>
3.1.	MCU Cards .....	5
3.2.	Memory-Based Smart Cards .....	5
<b>4.0.</b>	<b>Typical Applications.....</b>	<b>6</b>
<b>5.0.</b>	<b>Technical Specifications.....</b>	<b>7</b>



## 1.0. Introduction

ACM38 offers solutions for secured access control based on the PC-linked smart card reader. It comes in module that enables easy implementation of smart card-based solutions in embedded system. ACM38 utilizes the latest microchip technology, bringing you high security for your confidential files in a convenient and easy way.



### 1.1. Smart Card Reader

ACM38 supports ISO 7816 Classes A, B, and C smart cards. In addition, it works with different memory cards and microprocessor cards with T=0 and T=1 protocol. It features a USB Full Speed interface and a smart cards R/W speed of 344 Kbps. This highly durable device can last for at least 100,000 card insertion cycles.

### 1.2. Easy Installation

ACM38 is easy to install, use, and integrate in a different environment. It is PC/SC and CCID compliant, and its drivers are compatible with Windows, Linux, and Mac operating systems. This device is a powerful component that is ideal for Security, e-Banking and e-Payment, and e-Government applications.



## 2.0. Features

- USB 2.0 Full Speed Interface
- Plug and Play – CCID support brings utmost mobility
- Smart card reader:
  - Supports ISO 7816 Class A, B, and C (5 V, 3 V, 1.8 V) cards
  - With read and write support to all microprocessor cards with T=0 or T=1 protocols
  - Supports memory cards:
    - I2C bus Protocol Cards (1K bits to 1024K bits)
    - Secure Memory cards (Atmel AT88SC153 and AT88SC1608)
    - Memory Card with Secure Logic (AT88SC101/102/1003)
  - Supports SLE 4404/06/18/28/32/36/42, SLE 5518/28/32/36/42, SLE 6636
  - Supports PPS (Protocol and Parameters Selection)
  - With Short Circuit Protection
- Compliant with the following standards:
  - EN60950/IEC60950
  - PC/SC
  - CCID
  - RoHS
  - CE
  - FCC
  - Microsoft WHQL
  - VCCI



## 3.0. Supported Card Types

### 3.1. MCU Cards

ACM38 operates with any MCU card following either the T=0 or T=1 protocol.

### 3.2. Memory-Based Smart Cards

ACM38 works with several memory-based smart cards such as:

- Cards following the I2Cbus protocol (free memory cards) with maximum 128 bytes page with capability, including:
  - Atmel: AT24C01/02/04/08/16/32/64/128/256/512/1024
  - SGS-Thomson: ST14C02C, ST14C04C
  - Gemplus: GFM1K, GFM2K, GFM4K, GFM8K
- Cards with secure memory IC with password and authentication, including:
  - Atmel: AT88SC153 and AT88SC1608
- Cards with intelligent 1k bytes EEPROM with write-protect function, including:
  - Infineon: SLE4418, SLE4428, SLE5518 and SLE5528
- Cards with intelligent 256 bytes EEPROM with write-protect function, including:
  - Infineon: SLE4432, SLE4442, SLE5532 and SLE5542
- Cards with '104' type EEPROM non-reloadable token counter cards, including:
  - Infineon: SLE4406, SLE4436, SLE5536 and SLE6636
- Cards with Intelligent 416-Bit EEPROM with internal PIN check, including:
  - Infineon: SLE4404
- Cards with Security Logic with Application Zone(s), including:
  - Atmel: AT88SC101, AT88SC102 and AT88SC1003




## 4.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Public Key Infrastructure
- Network Security
- Access Control
- Loyalty Program



## 5.0. Technical Specifications

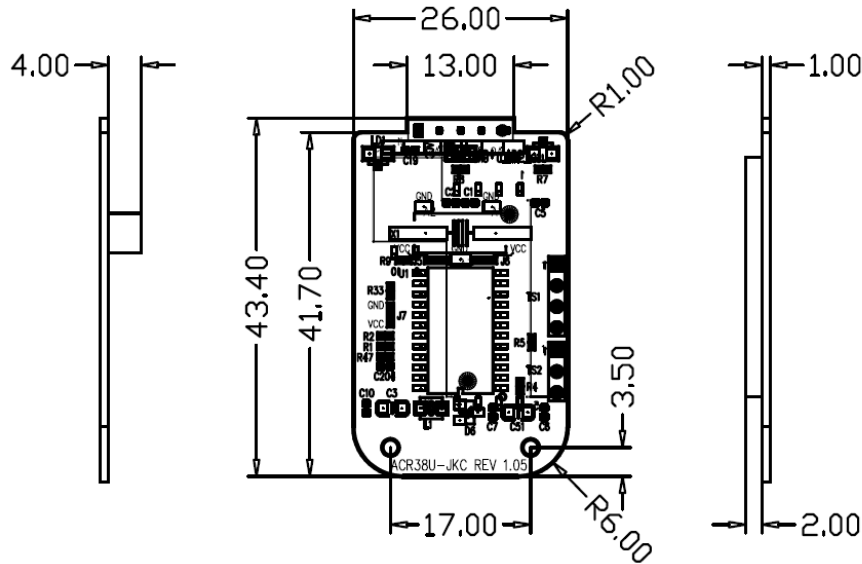

### Universal Serial Bus Interface

Type ..... USB full speed, four lines: +5 V, GND, D+ and D-  
Power source ..... From USB  
Speed ..... 12 Mbps

### Smart Card Interface

Standard ..... ISO 7816 Class A, B and C (5 V, 3 V, 1.8 V), T=0 and T=1  
Supply current ..... max. 50 mA  
Smart card read / write speed ..... max. 344,086 bps  
Short circuit protection ..... +5 V / GND on all pins  
*The presence of the smart card power supply voltage is indicated through a green LED on the reader.*  
CLK frequency ..... 4 MHz  
Card connector ..... Contact  
Card insertion cycles ..... min. 100,000

### Physical Specifications

Dimensions ..... 43.4 mm (L) x 26.0 mm (W) x 7.0 mm (H)

### Operating Conditions

Temperature ..... 0 – 50 °C  
Humidity ..... 10% - 90%

### Certifications/Compliance

EN 60950/IEC 60950, EMV 2000 Level 1, PC/SC, CCID, RoHS, USB Full Speed  
Microsoft © WHQL 2000, Server 2003, XP, Vista, Server 2008, Server 2008 R2, 7

### Device Driver Operating System Support

Windows © 98, ME, 2000, Server 2003, XP, Vista, Server 2008, Server 2008 R2, 7  
Linux, Mac

