



Advanced Card Systems Ltd.
Card & Reader Technologies

ACR38U-I1

Smart Card Reader



Technical Specifications V1.09



Table of Contents

1.0.	Introduction	3
1.1.	Smart Card Reader.....	3
1.2.	Modern Design	3
1.3.	Ease of Integration.....	3
2.0.	Features	4
3.0.	Supported Card Types	5
3.1.	MCU Cards	5
3.2.	Memory-based Smart Cards.....	5
4.0.	Typical Applications.....	6
5.0.	Technical Specifications.....	7



1.0. Introduction

ACR38U-I1 is the latest addition to the ACR38 PC-linked Smart Card Reader Series. Combining secure smart card reader technology functionalities with a sleek and modern design, ACR38U-I1 is the perfect peripheral for your smart card applications.



1.1. Smart Card Reader

ACR38U-I1 supports ISO 7816 Class A, B and C smart cards and microprocessor cards with the T=0 and T=1 protocol. Also, it supports a wide variety of memory cards in the market, including the Department of Defense Common Access Card (CAC). This makes it perfect for a broad range of solutions, such as PIV Application, Physical and Logical Access Control, Digital Signature, and Online Banking.

1.2. Modern Design

The new sleek and stylish design of ACR38U-I1 makes it stand out from ordinary smart card readers. This trendy device houses the powerful ACR38 core, which has been proven to support highly demanding smart card applications. It also features a USB Full Speed interface and a smart card reader/writer speed of 344 Kbps. Highly durable, ACR38U-I1 can last for at least 100,000 card insertion cycles.

1.3. Ease of Integration

ACR38U-I1 is easy to install, use and integrate into a PC environment. It is PC/SC and CCID compliant, and its drivers are compatible with Windows®, Linux® and Mac operating systems. In addition, ACR38U-I1 may now be used on mobile devices running the Android™ platform with versions 3.1 and above.

With its various features, the ACR38U-I1 is the perfect smart card reader for your smart card solution.



2.0. Features

- USB 2.0 Full Speed Interface
- Plug and Play – CCID support brings utmost mobility
- Smart Card Reader:
 - Supports ISO 7816 Class A, B and C (5 V, 3 V, 1.8 V) cards
 - Supports CAC (Common Access Card)
 - Supports microprocessor cards with T=0 or T=1 protocol
 - Supports memory cards
 - Supports PPS (Protocol and Parameters Selection)
 - Features Short Circuit Protection
- Application Programming Interface:
 - Supports PC/SC
 - Supports CT-API (through wrapper on top of PC/SC)
- Supports Android™ 3.1 and above¹
- Compliant with the following standards:
 - FIPS 201
 - TAA
 - EN60950/IEC 60950
 - ISO 7816
 - CE
 - FCC
 - UL
 - KC
 - VCCI
 - PC/SC
 - CCID
 - EMV 2000 Level 1
 - Microsoft® WHQL
 - RoHS 2
 - REACH

¹ PC/SC and CCID support are not applicable



3.0. Supported Card Types

3.1. MCU Cards

ACR38U-I1 operates with ISO 7816 MCU card following either the T=0 or T=1 protocol. It also works with CAC cards, ideal for US PIV and PKI applications.

3.2. Memory-based Smart Cards

ACR38U-I1 works with several memory-based smart cards such as:


- Cards following the I2C bus protocol (free memory cards) with maximum 128 bytes page with capability, including:
 - Atmel®: AT24C01/02/04/08/16/32/64/128/256/512/1024
 - SGS-Thomson: ST14C02C, ST14C04C
 - Gemplus: GFM1K, GFM2K, GFM4K, GFM8K
- Cards with secure memory IC with password and authentication, including:
 - Atmel®: AT88SC153 and AT88SC1608
- Cards with intelligent 1 KB EEPROM with write-protect function, including:
 - Infineon®: SLE4418, SLE4428, SLE5518 and SLE5528
- Cards with intelligent 256-byte EEPROM with write-protect function, including:
 - Infineon®: SLE4432, SLE4442, SLE5532 and SLE5542
- Cards with '104' type EEPROM non-reloadable token counter cards, including:
 - Infineon®: SLE4406, SLE4436, SLE5536 and SLE6636
- Cards with Intelligent 416-bit EEPROM with internal PIN check, including:
 - Infineon®: SLE4404
- Cards with Security Logic with Application Zone(s), including:
 - Atmel®: AT88SC101, AT88SC102 and AT88SC1003



4.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Public Key Infrastructure
- Network Security
- Access Control
- Loyalty Program

5.0. Technical Specifications

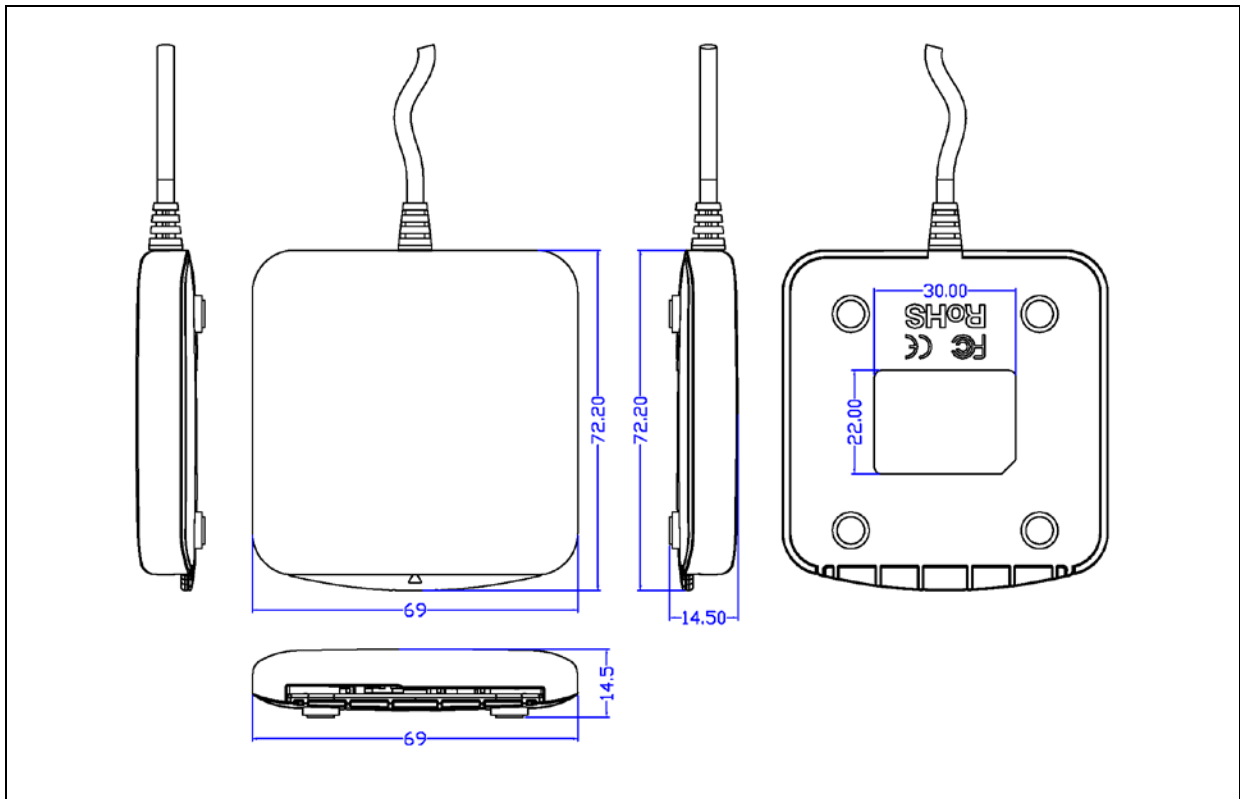

Universal Serial Bus Interface

Type USB Full Speed, four lines: +5 V, GND, D+ and D-
Power Source From USB
Speed 12 Mbps

Contact Smart Card Interface

Standard ISO 7816 Class A, B and C (5 V, 3 V, 1.8 V), T=0 and T=1
Supply Current Max. 50 mA
Smart Card Read/Write Speed Max. 344,086 bps
Short Circuit Protection +5 V/GND on all pins
CLK Frequency 4 MHz
Card Connector Contact
Card Insertion Cycles Min. 100,000

Physical Specifications

Dimensions 72.2 mm (L) x 69.0 mm (W) x 14.5 mm (H)
Color White
Weight 65 g (± 5 g allowance for cable)
Cable length, cord, connector 1.5 m, Fixed (non-detachable), USB A

Built-in Peripheral

LED 1 LED, Green

Operating Conditions

Temperature 0 °C – 50 °C
Humidity Max. 90% (non-condensing)
MTBF 500,000 hrs

Application Programming Interface

PC/SC
CT-API (through wrapper on top of PC/SC)

Certifications/Compliance

EN60950/IEC 60950, ISO 7816, FIPS 201, TAA, CE, FCC, KC, VCCI, UL, PC/SC, CCID,
EMV 2000 Level 1, RoHS 2, REACH, USB Full Speed
Microsoft® WHQL for Windows® 2000, Windows® XP, Windows Vista®, Windows® 7, Windows® 8,
Windows® 8.1, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2,
Windows® Server 2012, Windows® Server 2012 R2



Device Driver Operating System Support

Windows® CE, Windows® 98, Windows® ME, Windows® 2000, Windows® XP, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2
Linux®, Mac OS®, Android™ 3.1 and above



Android is a trademark of Google Inc.
Atmel is registered trademark of Atmel Corporation or its subsidiaries, in the US and/or other countries.
Infineon is a registered trademark of Infineon Technologies AG.
Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.
Mac OS is a trademark of Apple Inc.
Microsoft, Windows and Windows Vista are trademarks of the Microsoft group of companies.