



SMART FLOPPY SMART CARD READER

ACR39F-A2

ADAPTABLE & VERSATILE

ACS' ACR39F-A2 Smart Floppy is the ideal solution for easy integration of smart card readers into desktop environments. Adopting a USB interface, it is powered by the computer's internal power supply, and can be configured according to customers' preferences.

The ACR39F-A2 supports ISO 7816 Class A, B, and C smart cards, as well as different memory cards and microprocessor cards in the market with T=0 and T=1 protocol. It features a USB Full Speed interface and a smart card read/write speed of 600 Kbps, and is highly durable as it is able to last for at least 200,000 card insertion cycles.

Aside from being PC/SC and CCID compliant, the device's drivers are also compatible with operating systems such as Windows®, Linux®, macOS, Solaris™ and Android™ (Versions 3.1 and later).

With its widely applicable features, the ACR39F-A2 is sure to be the ideal solution for Security, e-Payment and e-Government applications.

KEY FEATURES

- ✓ **Supports Various Types of Contact Cards**
 - ISO 7816 Class A, B and C (5 V, 3 V and 1.8 V)
 - Microprocessor Card (T=0, T=1)
 - Memory Card
 - CAC, SIPRNET, and J-LIS Smart Cards
- ✓ **Reliable**
 - Certified for International Regulations
 - EN 62368/IEC 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EMV™ Level 1 (Contact), J-LIS, ISO 7816, USB Full Speed
 - Mean Time Between Failures (MTBF) up to 500k Hours
 - Card Insertion Cycles: 200k Times
 - Short Circuit Protection
 - PPS (Protocol and Parameters Selection)
- ✓ **Compatible**
 - Supports All Major Operating Systems
 - Windows®, Linux®, macOS, and Android™ (Versions 3.1 and later)



COMMON APPLICATIONS

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Public Key Infrastructure
- Network Security
- Access Control
- e-Purse and Loyalty




TECHNICAL SPECIFICATIONS

Contact Smart Card Interface	
Number of Slot(s)	1 Full-Sized Card Slot
Supply Current	Max. 50 mA
Supported Card Types	ISO 7816 Parts 1-4, Class A, B, C (5 V, 3 V, 1.8 V), Microprocessor Card (T=0, T=1), Memory Card, CAC, SIPRNET, J-LIS Smart Cards
Supply Current	Max. 50 mA
Read/Write Speed	9.6 – 600 Kbps
Clock Frequency	4.80 MHz; Operates Up to 16MHz
Card Connector	Sliding
Card Insertion Cycles	Min. 200,000
PPS (Protocol and Parameters Selection)	Supported
Short Circuit Protection	Supported
Host Interface	
Protocol	USB CCID
Connector Type	1 x 5 Pins Header Connector
USB Interface	USB 2.0 Full Speed (12Mbps) Compatible with USB 3.0
Power Source	From USB Port
Supply Voltage	5 V

Physical Characteristics	
Dimensions	125.0 mm (L) × 101.0 mm (W) × 25.5mm (H)
Weight	82.5 g
Color	Black
Built-In Peripheral	
LED	Green
Operating Conditions	
Temperature	0 - 60°C
Humidity	90% (Non-Condensing)
MTBF	500,000 Hours
Drivers & Support	
Driver Supported OS	Windows®, Linux®, macOS Android™
Model/Part Number	
Default	ACR39F-A2
Certifications	
System/Standards	EN60950/IEC 60950, ISO7816, USB Full Speed, EMV™ Level 1 (Contact), PC/SC, CCID, CE, FCC, WEEE, RoHS, REACH, Microsoft® WHQL
Application Programming Interface	
PC-Linked Mode	PC/SC

MECHANICAL SPECIFICATIONS

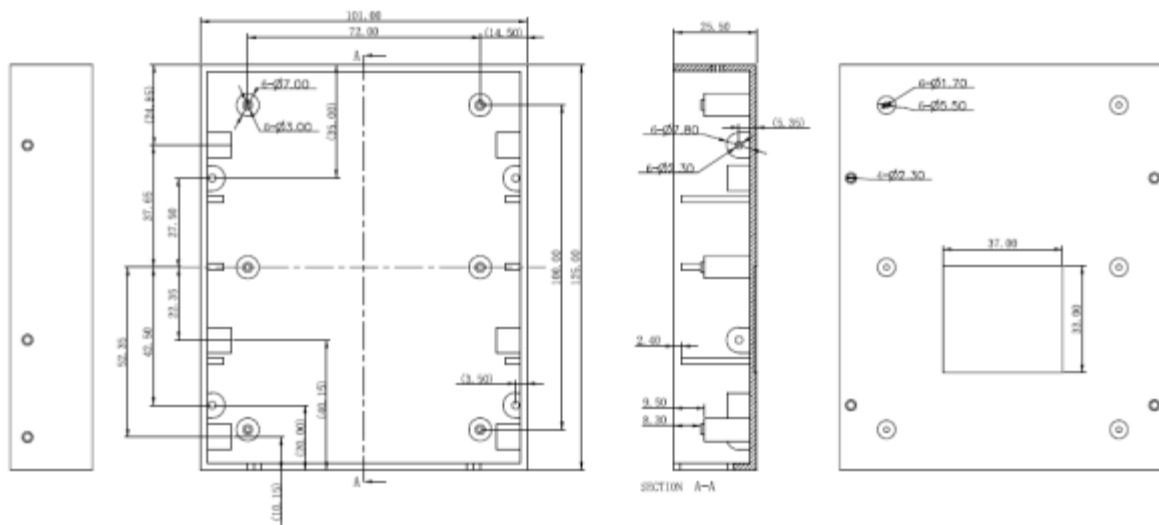

About ACS

Advanced Card Systems Ltd. (ACS), founded in 1995, is Asia Pacific's top supplier and one of the world's top 3 suppliers of PC-linked smart card readers. ACS is the winner of the Product Quality Leadership Award for Smart Card Readers from Frost & Sullivan. In 2010, 2014 and 2015, ACS was listed in Forbes Asia's "Best Under a Billion" list, an inter-industry list comprised of 200 top-performing publicly listed companies in the Asia-Pacific, with sales between US\$5 million and US\$1 billion. ACS develops a wide range of high-quality smart card reading/writing devices, smart cards and related products and distributes them to over 100 countries worldwide.

Click [here](#) for Sales Enquiry

Tel: +852-2796-7873

Fax: +852-2796-1286

EMV is a registered trademark or trademark of EMVCo LLC in the United States and other countries.
 macOS and Safari® are registered trademarks of Apple Inc., registered in the U.S. and other countries.
 Windows® is a trademark of Microsoft Corporation in the United States and/or other countries.
 Android™ and Google Chrome™ are trademarks of Google LLC.
 Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.



www.acs.com.hk

info@acs.com.hk