



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACR890

## All-in-One Mobile Smart Card Terminal

Technical Specifications V2.00





## Table of Contents

|             |                                      |          |
|-------------|--------------------------------------|----------|
| <b>1.0.</b> | <b>Introduction .....</b>            | <b>3</b> |
| <b>2.0.</b> | <b>Features .....</b>                | <b>4</b> |
| <b>3.0.</b> | <b>Supported Card Types .....</b>    | <b>5</b> |
| 3.1.        | MCU Cards .....                      | 5        |
| 3.2.        | Contactless Cards .....              | 5        |
| 3.3.        | Magnetic Stripe Cards .....          | 5        |
| <b>4.0.</b> | <b>Typical Applications.....</b>     | <b>6</b> |
| <b>5.0.</b> | <b>Technical Specifications.....</b> | <b>7</b> |



## 1.0. Introduction

The ACR890 All-In-One Mobile Smart Card Terminal is the next generation, high-performance mobile smart card terminal that combines smart card, magnetic stripe and contactless technologies. With its high-resolution touch screen, it is suitable for customers who want to experience the most interactive interface and features available in the market. This state-of-art product offers faster processing speed, large memory and portability.

This next generation PIN-pad reader is flexible enough to offer wide-range of connectivity choices for any environment, including GPRS/3G and Wi-Fi. Moreover, a built-in thermal printer on the device can quickly print receipts for the consumer's reference.

With its advanced features, the ACR890 is suitable for complex applications in the e-Government, e-Banking and e-Payment, e-Health, Loyalty Program and Transportation sectors.





## 2.0. Features

- 32-bit A8 Processor running Embedded Linux®
- 4 GB Flash and 256 MB RAM
- Expandable Micro SD card support with memory of 1 GB up to 16 GB
- Connectivity Support:
  - Wi-Fi
  - GPRS/GSM quad band (850 MHz, 900 MHz, 1800 MHz, 1900 MHz)
  - 3G connectivity support (900 MHz/2100 MHz or 850 MHz/1900 MHz)
  - Serial RS-232 for Debug (Mini-B Type Connector)
- Contact Interface:
  - One Full-sized Contact Card Slot
- Contactless Interface:
  - Integrated Contactless Smart Card Interface
- Magnetic Stripe Card Support
- SAM Interface:
  - Two SAM Slots (Contact Connector)
- SIM Interface:
  - One Standard SIM Card Slot (GPRS function)
- Firmware Upgradeability
- Built-in-Peripherals:
  - Easy-to-Read, High Resolution Colored LCD
  - 3.5-inch Resistive Touch Screen LCD
  - Highly Durable Chemical Resistant 20-button Keypad
  - Thermal Printer
  - Real-time Clock (RTC) with independent backup battery
  - 4 LED Status Indicators
  - Built-in Speaker
  - (Optional) 1D and 2D barcode reader
- Compliant with the following standards:
  - ISO 7816
  - ISO 14443
  - ISO 7811
  - RoHS 2



## **3.0. Supported Card Types**

### **3.1. MCU Cards**

The ACR890 operates with MCU cards that follow:

- T=0 or T=1 Protocol
- ISO 7816—compliant Class A, B, C (5 V, 3 V, 1.8 V)

### **3.2. Contactless Cards**

The ACR890 supports the following contactless cards:

- ISO 14443 Type A and B, Parts 1 - 4
- T=CL protocol
- MIFARE Classic®
- MIFARE® DESFire®
- MIFARE Ultralight®
- MIFARE Plus®
- FeliCa
- FeliCa Lite
- FeliCa Lite-S

### **3.3. Magnetic Stripe Cards**

The ACR890 supports the following magnetic stripe cards:


- ISO 7811 Tracks 1, 2 and 3
- Bi-directional



## 4.0. Typical Applications

- e-Healthcare
- e-Government
- e-Banking and e-Payment
- Transportation
- Loyalty Program

## 5.0. Technical Specifications

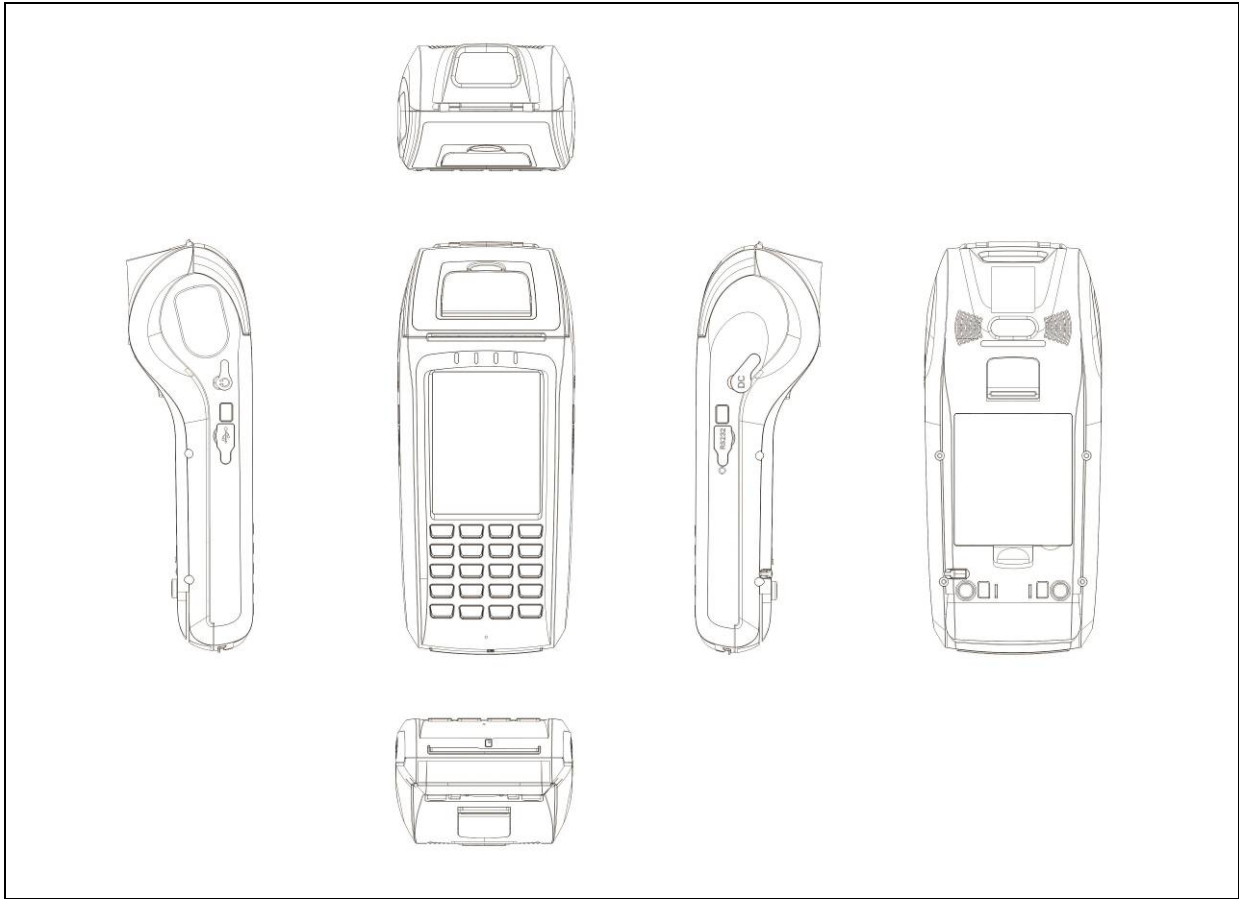

### Physical Characteristics

Dimensions ..... 208.0 mm (L) × 85.5 mm (W) × 53.0 mm (H)  
 Weight..... 580 g (including battery and thermal paper)  
 Color ..... Black

### Processor

32-bit A8 1 GHz Processor

### Standalone Mode

Operating System ..... Embedded Linux  
 Power Source..... Lithium-ion battery, 7.4 V, 2000 mAh  
 ..... Charging via external power adapter, 12 V, 4 A

### Device and User Programmable Memory

Programmable Language..... C++  
 Flash ..... 4 GB  
 RAM..... 256 MB  
 SD Memory Card Size ..... Up to 16 GB

### Connectivity

Wi-Fi..... IEEE 802.11 b/g/n  
 Quad-band GSM/GPRS ..... 850 MHz/900 MHz/1800 MHz /1900 MHz  
 WCDMA ..... 900 MHz/2100 MHz or 850 MHz/1900 MHz

### Contact Smart Card Interface

Number of Slot ..... 1 Full-sized Card Slot  
 Standard ..... ISO 7816 Class A, B, C (5 V, 3 V, 1.8 V)  
 Protocol..... T=0; T=1; Memory Card Support  
 Supply Current ..... Max. 50 mA  
 Short Circuit Protection ..... (+5) V/GND on all pins  
 Card Connector Type..... ICC Slot 0: Contact  
 Card Insertion Cycles..... Min. 100,000



**Contactless Smart Card Interface**

Standard ..... ISO 14443 A and B Parts 1-4, MIFARE, FeliCa  
 Protocol..... MIFARE Classic Card Protocols, T=CL  
 Operating Frequency ..... 13.56 MHz  
 Operating Distance ..... Up to 40 mm

**Magnetic Card Interface**

Standard ..... ISO 7811  
 ..... Track 1/2/3, Bi-directional

**SAM Card Interface**

Number of Slots ..... 2 Standard SIM-sized  
 Card Connector Type..... SAM Slot 0: Contact  
 ..... SAM Slot 1: Contact

**SIM Card Interface**

Number of Slot ..... 1 Standard SIM-sized  
 Standard ..... GSM SIM Card  
 Protocol..... GPRS/WCDMA

**Memory Expansion**

Micro SD Card Slot ..... Supports up to 16 GB

**Built-in Peripherals**

LCD ..... 3.5-in. TFT-LCD, 240 x 320 Color LCD with backlight  
 LED ..... 4 single-colors: Blue, Yellow, Green and Red  
 Keypad..... 20 keys  
 Speaker..... 20 Hz – 20 KHz

**Other Features**

Firmware Upgrade ..... Supported  
 Real-time Clock..... Supported

**Printer**

Printer Type ..... Thermal, Built-in  
 Number of Dots/Lines ..... 384  
 Resolution ..... 203 DPI  
 Print Width ..... 48 mm  
 Speed..... Max. 75 mm/s  
 Paper Width ..... 58 mm  
 Paper Roll Diameter..... Max. 30 mm

**Barcode Scanner (Optional)**

Scanner Type ..... Imager  
 Supported Barcode Type ..... 1D and 2D

**Operating Conditions**

Temperature..... 0°C – 50°C  
 Humidity ..... Max. 90% (non-condensing)  
 MTBF ..... 26,500 hrs

**Certifications/Compliance**

ISO 7816, ISO 14443, ISO 7811, RoHS 2



Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
 MIFARE, MIFARE Classic, MIFARE DESFire, MIFARE Ultralight and MIFARE Plus are registered trademarks of NXP B.V. and are used under license.